

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 023 052
A1

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 80104370.4

(51) Int. Cl.³: B 60 H 1/00


(22) Date of filing: 24.07.80

(30) Priority: 24.07.79 JP 94769/79

(43) Date of publication of application:
28.01.81 Bulletin 81(84) Designated Contracting States:
DE FR GB(71) Applicant: NIPPONDENSO CO., LTD.
1, 1-chome Showa-cho
Kariya-shi Aichi-ken(JP)(72) Inventor: Inoue, Yozo
5-11-1, Showa
Chiryu-shi Aichi-Ken(JP)(72) Inventor: Ito, Yoji
7-12, Tenno-cho
Kariya-shi Aichi-ken(JP)(72) Inventor: Hara, Kiyoshi
2-33, Shintomi-cho
Kariya-shi Aichi-ken(JP)(72) Inventor: Usami, Kiyoshi
69, Momoyama-cho 4-chome
Oobu-shi Aichi-ken(JP)(72) Inventor: Iwata, Yasuhiro
1-71, Aza Shimoimaike Ooaza Morioka
Higashiura-cho Chita-gun Aichi-ken(JP)(74) Representative: Klingseisen, Franz, Dipl.-Ing. et al,
Bräuhäusstrasse 4
D-8000 München 2(DE)

(54) A method and an apparatus for air conditioning for vehicles by controlling circulation of inside air and introduction of outside air.

(57) A method for air conditioning for vehicles comprising a step of detecting a temperature of a passenger compartment of a vehicle, an atmospheric temperature and a preset temperature in the initial period of air conditioning, a step of judging the results of comparisons between said temperatures and a step of switching between air conditioning by the circulation of inside air and air conditioning by the introduction of outside air:

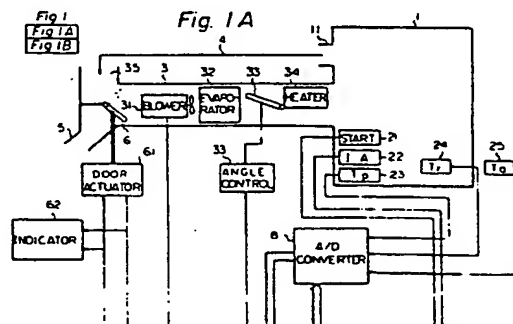

EP 0 023 052 A1

A METHOD AND AN APPARATUS FOR AIR CONDITIONING FOR
VEHICLES BY CONTROLLING CIRCULATION OF INSIDE
AIR AND INTRODUCTION OF OUTSIDE AIR

TECHNICAL FIELD

The present invention relates to a method and apparatus for air conditioning for vehicles with passenger compartments, such as automobiles, by controlling the circulation of inside air and the introduction of outside air.

BACKGROUND ART

A method for controlling an automobile air conditioner has been known in which heating or cooling of air is

controlled by an air conditioner and a switch door in the path of the air is switched between a position enabling the circulation of inside air and a position enabling the introduction of outside air (See U. S. P. 3315730).

However, in such a prior art method, only a limited number of variables are detected to determine the switching

between the circulation of inside air and the introduction of outside air. Accordingly, such a prior art method

cannot comply with the requirement that the air conditioning for a vehicle should be controlled by taking into account various factors associated with the conditions of the

vehicle and the temperature at any time of year.

SUMMARY OF THE INVENTION

It is the main object of the present invention to provide a method and an apparatus of air conditioning for vehicles by controlling the circulation of inside air and

the introduction of outside air in which the air conditioning for a vehicle is effected in optional manner in accordance with the relationships among a passenger compartment temperature, an atmospheric temperature and a preset temperature.

According to the present invention, a method for air conditioning for vehicles with passenger compartments by controlling the circulation of inside air and the introduction

of outside air is provided in which an inlet for inside air and an inlet for outside air are selectively opened and closed, and the circulation of inside air and the introduction of outside air are selectively effected, said
5 method is characterized in comprising a step of detecting a temperature of a passenger compartment of a vehicle, atmospheric temperature and a preset temperature in an initial period of air conditioning, a step of judging the results of comparisons between said temperatures and a
10 step of switching between air conditioning by the circulation of inside air and air conditioning by the introduction of outside air.

BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1A and 1B illustrate an apparatus for air
15 conditioning for an automobile in accordance with an embodiment of the present invention,

Fig. 2 illustrates a logic flow chart of a control procedure for the system of Figs. 1A and 1B, and,

Fig. 3 illustrates a modified embodiment of a switch
20 door.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

A system of air conditioning for an automobile in accordance with an embodiment of the present invention is illustrated in Figs. 1A and 1B. A duct 3 is connected to
25 a passenger compartment 1, a switch door 6, a blower 31, a evaporator 32, an air blend door 33 and a heater 34 are provided in the duct 3. When the switch door 6 is in its uppermost position, outdoor air is introduced into the passenger compartment 1 through an inlet 5 and the duct 3
30 and is exhausted through an outlet 11. When the switch door 6 is in its lowermost position, the inside air is circulated from the passenger compartment 1 through an inside air channel 4 and the duct 3 and back to the passenger compartment 1. The blending of the air cooled by the
35 evaporator 32 and the air heated by the heater 34 is controlled by the angle of the air blend door 33.

A starter switch 21, an inside air circulation command

switch 22, a manual temperature preset device 23 and a passenger compartment temperature sensor 24 are arranged in the passenger compartment 1. An outside air temperature sensor 25 is provided outside the passenger compartment 1.

- 5 The position of the switch door 6 is controlled by a door actuator 61. The angle of the air blend door 33 is controlled by an angle controller 331.

A computer circuit 7 and an analog-to-digital converter 8 are provided to control the air conditioning system of Figs. 1A and 1B. The computer circuit 7 comprises a clock circuit 71, a central processing unit 72, a random access memory 73, a read only memory 74, a bus 75 and an I/O circuit 76. The computer circuit 7 is powered by a voltage (e.g. 5 volt) stabilized power source (not shown in Fig. 1B) which is powered by a storage battery provided in the vehicle. The read only memory 74 stores control programs defining calculation procedures in steps of control. The central processing unit 72 effects the calculation using the control programs which are read out step by step from the read only memory 74. The output signals of the I/O circuit 76 are supplied to the door actuator 61, an indicator 62, the blower 31 and the angle controller 331. The clock circuit 71 receives the output of a crystal oscillator 711. The analog-to-digital converter 8 is connected with the computer circuit 7. The outputs of the starter switch 21 and the inside air circulation command switch 22 are supplied to the computer circuit 7. The outputs of the manual temperature preset device 23, the passenger compartment temperature sensor 24 and the outside air temperature sensor 25 are supplied to the analog-to-digital converter 8.

Due to the computation effected in the computer circuit 7, the status of an initial period of air conditioning is detected and three temperatures i.e. an outside air temperature, an inside air temperature and a preset temperature are compared. As a result of the computation in the computer circuit 7, this control signals produced by the I/O circuit 76 of the computer circuit 7 are supplied to

the door actuator 61, the blower 31 and the angle controller 331 to effect the selection between the circulation of inside air and the introduction of outside air.

The control procedure for controlling the door actuator 5 61 will not be described with reference to a logic flow chart Fig. 2.

The computer circuit 7 starts operation by receiving a power supply with a stabilized voltage from the voltage stabilized power source. The computer circuit 7 effects 10 the calculation of the control programs of the order of millisecond with the cycle of the order of hundred milliseconds. At the beginning of the procedure, the on/off condition of the starter switch 21 is determined at a step a. If the starter switch 21 is in an ON state, a flag 15 which indicates the status of the initial period of air conditioning is set at a step b, while if the starter switch 21 is in an OFF state, the procedure proceeds directly to a step c without passing through step b. At the step c, the variables, i.e. T_r (passenger compartment 20 temperature), T_a (atmospheric temperature) and T_p (preset temperature), which are detected by the passenger compartment temperature sensor 24, the outside air temperature sensor 25 and the manual temperature preset device 23, are supplied to the computer circuit 7 via the analog-to-digital converter 8. Then the procedure proceeds to a step d where 25 the existence of a flag is determined. If a flag exists, the procedure proceeds to a step e which is the first step of the initial period control steps, while if no flag exists, the procedure proceeds to a step j which is the 30 first step of the steady period control steps.

Comparisons between T_r and T_a , and, T_r and T_p , are effected in steps e, f and g. Either the step h, which instructs the introduction of outside air, or a step i, which instructs the circulation of inside air, is selected 35 according to the results of the judgements in the steps e, f and g.

Whether or not the inside air circulation command

switch 22 is in an ON state is determined at the step j to select either a step k which instructs the circulation of inside air or a step l which instructs the introduction of outside air.

After steps h, i, k and l, the procedure proceeds to a step m where it is determined whether or not the absolute value of the difference between T_p and T_r is less than one degree centigrade. If this absolute value is less than one degree centigrade, the flag is reset at a step n and the procedure is terminated. However, if this absolute value is not less than one degree centigrade, the procedure is terminated without passing through the step n.

Examples of the manner of control of the system of Figs. 1A and 1B will now be explained with reference to Fig. 2. Firstly, a control manner for the condition:

$$T_a > T_r > T_p \text{ or } T_a < T_r < T_p$$

is explained. This condition is realized when the passenger compartment temperature is between the atmospheric temperature and the preset temperature. In the initial period of air conditioning, the procedure proceeds from the step a through the steps b, c and d to the step e. Under the above mentioned temperature condition, the procedure proceeds either from the input of the step e through the input of the step f to a Y (yes) output of the step f or from the input of the step e through the input of the step g to an N (no) output of the step g. Thus, the inside air circulation instruction (step i) is produced in the I/O circuit 76 of the computer circuit 7 so that the door actuator 61 is controlled to make the position of the switch door 6 be in its lowermost position. Accordingly, the air conditioning by inside air circulation is carried out. Even if the procedure proceeds to the step m, the result of judgement at the step m is N (no) because in the initial period of air conditioning the difference between T_r and T_p is usually greater than one degree centigrade.

The above described procedure from the step a via the steps b, c, d, e, f, g and i to the N (no) output of the step m is repeated until the judgement at the step m becomes Y (yes) regardless of whether the step a is at
5 N (no).

When the judgement at the step m becomes Y (yes) as a result of air conditioning of the passenger compartment 1, the step n produces an instruction to reset the flag. Then, the judgement at the step d becomes N (no) and the
10 procedure proceeds to the step j. If the inside air circulation command switch 22 is in an OFF state, the judgement at the step j produces a N (no) output and the instruction of introduction of outside air is produced at the step l so that the I/O circuit 76 of the computer
15 circuit 7 controls the door actuator 61 to make the position of the switch door 6 be in its uppermost position. Accordingly, the manner of air conditioning is changed from inside air circulation to an introduction of outside air. Then, the above described procedure from the step a via
20 the steps d, j and l to the step n is repeated.

During this repetition, if the inside air circulation command switch 22 is switched on, the judgement at the step j becomes Y (yes) so that the instruction of inside air circulation is produced at the step k so that the I/O
25 circuit 76 of the computer circuit 7 controls the door actuator 61 to make the position of the switch door 6 be in its lowermost position. Accordingly, the manner of air conditioning is changed from an introduction of outside air to inside air circulation.

30 Secondly, a control manner for the condition:

$$T_r > T_a > T_p$$

is explained. This condition is realized when the air
35 conditioning is applied to an automobile which is not in motion and has its doors and windows closed when the atmospheric temperature is high. In this case, the passenger

compartment temperature has been raised extraordinarily higher than T_a and T_p . In the initial period of air conditioning, the procedure proceeds from the steps a through b, c and d to the step e. Under the above mentioned temperature condition, the step e produces the Y (yes) output which is supplied to the step f, and then the step f produces the N (no) output which is supplied to the step h. Thus the introduction of outside air instruction is produced in the I/O circuit 76 of the computer circuit 7, so that the air conditioning by introduction of outside air is carried out in order to discharge quickly the heat accumulated in the passenger compartment 1. Although the procedure proceeds to the step m, the result of judgement at the step m is N (no) because the difference between T_r and T_p is greater than one degree centigrade.

The above described procedure from the step a via the steps b, c, d, e, f and h to the N (no) output of the step m is repeated until the room temperature T_r falls down to the atmospheric temperature T_a . When the room temperature T_r falls below the atmospheric temperature T_a , the step e produces N (no) output which is supplied to the step g. Then, the step g produces N (no) output which is supplied to the step i. Accordingly, the circulation of inside air instruction is produced in the I/O circuit 76 of the computer circuit 7 so that the air conditioning by the circulation of inside air is carried out.

After further air conditioning is carried out, when the difference between T_r and T_p is reduced to less than one degree centigrade, the judgement at the step m becomes Y (yes) and the step n produces an instruction to reset the flag. Then, the judgement at the step d is turned to N (no) and the procedure proceeds to the step j. If the inside air circulation command switch is in an OFF state, the judgement at the step j produces a N (no) output and the instruction of introduction of outside air is produced at the step 2 so that the air conditioning by introduction of outside air is carried out.

BAD ORIGINAL

A modified embodiment of a switch door is illustrated in Fig. 3. The lowermost position of the switch door 600 is limited by a stopper 601. When the door 600 is in such a lowermost position limited by the stopper 601, air conditioning is carried out by both circulation of inside air and introduction of outside air. However, when the door 600 is in the uppermost position, air conditioning is carried out by the introduction of outside air. The instruction of circulation of inside air produced by the I/O circuit 76 (Fig. 1B) causes the position of the door 600 to be in the lowermost position limited by the stopper 601, while the instruction of introduction of outside air produced by the I/O circuit 76 causes the position of the door 600 to be in the uppermost position.

With regard to the apparatus of Figs. 1A and 1B, it is possible to use a microcomputer as the computer circuit 7. A microcomputer of 8048 type, manufactured by INTEL CORP. may be used. It is also possible to located one fan at the inlet 5 for introducing outside air and locate the other fan at a portion 35 of the duct 3 for circulating inside air, in place of the switch door 6. In such a case, switching between the outside air introduction and the inside air circulation can be carried out by switching selectively between these two fans.

It is possible to combine the control of the flow rate of the blower 31 to the control of the introduction of outside air and the circulation of inside air in the intial period of air conditioning as described hereinbefore with reference to Figs. 1A, 1B, 2 and 3. Such a control of flow rate of the blower 31 can be effected in such a manner that the introduction of outside air is conducted at the maximum flow rate and the flow rate for the circulation of inside air is controlled so that the flow rate is reduced gradually from the maximum flow rate.

It is possible to determine the ratio $Tr < Tp$ prior to determining that of $Tr > Ta$, instead of determining the ratio $Tr > Ta$ prior to determining that of $Tr < Tp$ as

described hereinbefore.

It is possible to change the position of the switch door 6 by manual operation by a person in the passenger compartment in accordance with indications of the indicator 5 62 which indicates the door control signal produced by the I/O circuit 76, instead of by the automatic control by the door actuator 61 described hereinbefore.

It is possible to add controls by the detect of harmful gases, by the detection of the capacity of air 10 conditioning, by the detection of humidity and the like to the control by the inside air circulation command switch 22 described hereinbefore.

It is possible to present a value in the computer circuit 7 which corresponds to the preset temperature, for 15 example, 25°C, instead of conducting the temperature preset by the manual temperature preset device 23 as described hereinbefore. Also, it is possible to provide means for modifying the above mentioned preset value in the computer circuit 7 in accordance with a change in 20 atmospheric temperature.


CLAIMS

1. A method for air conditioning for vehicles with passenger compartments by controlling circulation of inside air and introduction of outside air in which an inlet for inside air and an inlet for outside air are selectively opened and closed, and the circulation of inside air and the introduction of outside air are selectively effected, characterized in that said method comprises: a step of detecting a temperature of a vehicle passenger compartment, atmospheric temperature and a preset temperature in an initial period of air conditioning, a step of judging the results of comparisons between said temperatures and a step of switching between air conditioning by the circulation of inside air and air conditioning by the introduction of outside air.
2. An apparatus for air conditioning for vehicles by controlling circulation of inside air and introduction of outside air in which an inlet for inside air and an inlet for outside air are selectively opened and closed and the circulation of inside air and the introduction of outside air are selectively effected, characterized in that said apparatus comprises:
- means for sensing a temperature of a passenger compartment of a vehicle and an atmospheric temperature,
 - means for presetting a preset temperature,
 - switch means for causing a start of the air conditioning, and,
 - computer means for producing a control signal for selectively opening and closing said inlet for inside air or said inlet for outside air in accordance with data supplied by said temperature sensing and presetting means in an initial period of air conditioning.
3. An apparatus as defined in Claim 2 wherein said selective opening and closing of inlet for inside air or inlet for outside air is effected by the operation of a door actuator.
4. An apparatus as defined in Claim 2 wherein said

selective opening and closing of inlet for inside air or inlet for outside air is effected with the limitation by a stopper for a door.

5. An apparatus as defined in Claim 2 wherein said
5 computer means receives an outputs of a starter switch so that the on/off condition of the starter switch is determined in a step of calculation by said computer means.

Fig. 1
Fig. 1A
Fig. 1B



2/3

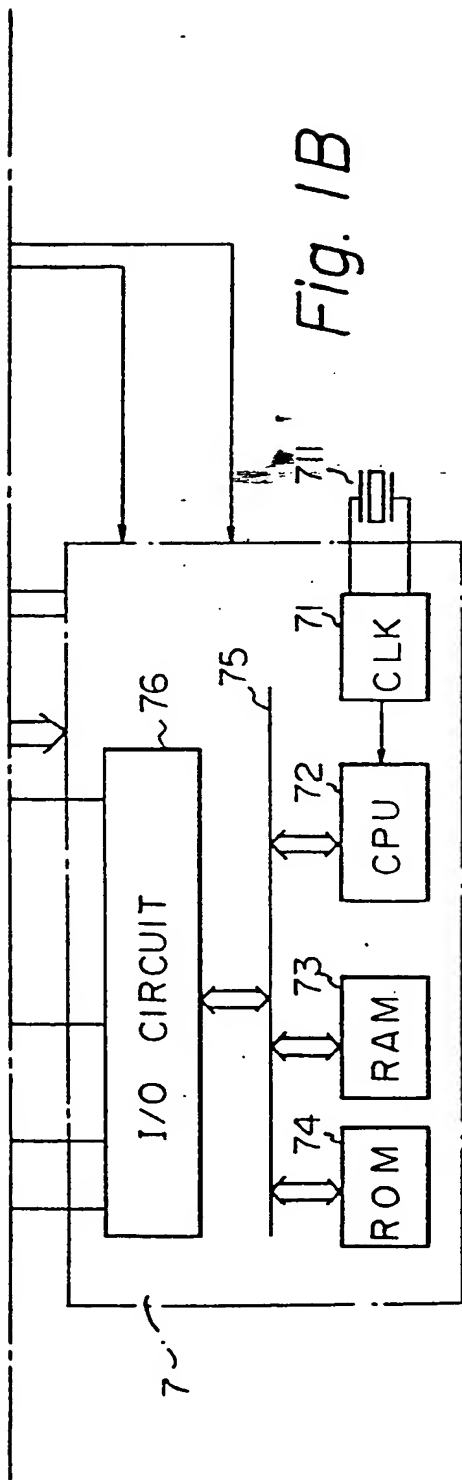


Fig. 1B


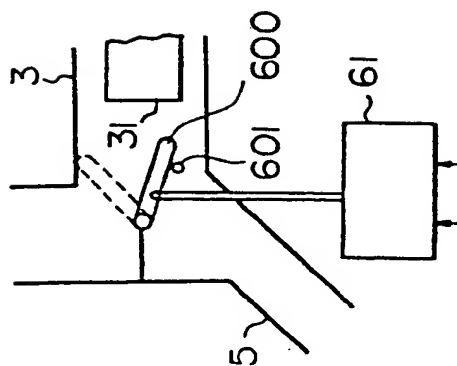


Fig. 3

3/3

Fig. 2



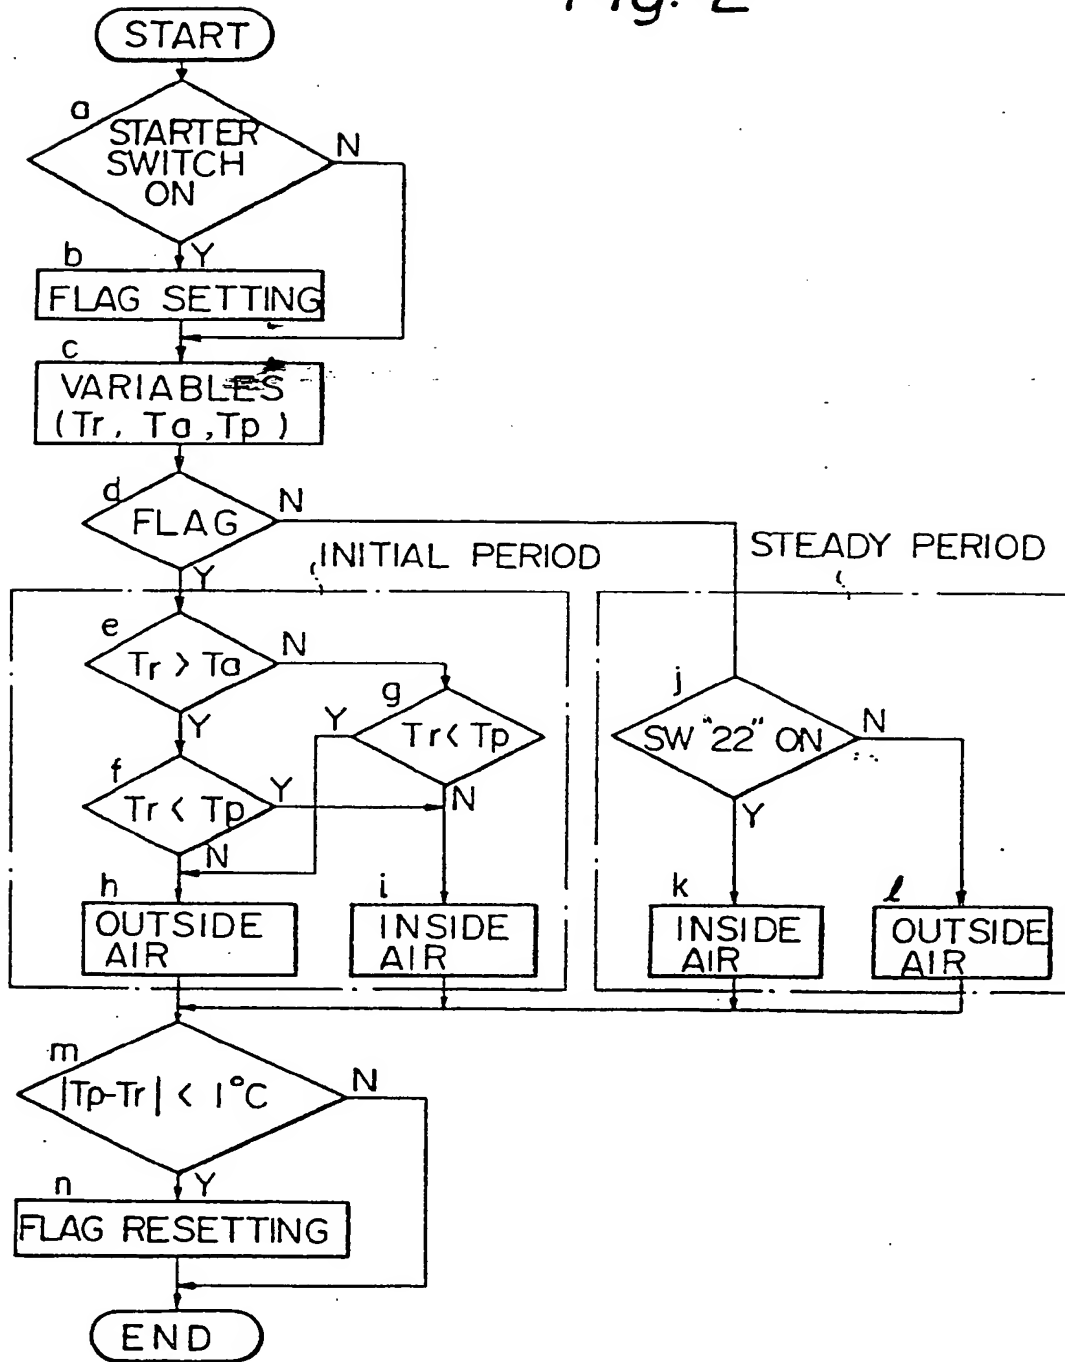

European Patent
Office

EUROPEAN SEARCH REPORT

0023052

Application number
EP 80 10 4370

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int. Cl.)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
	<p><u>FR - A - 2 379 392</u> (USINES CHAUS-SON)</p> <p>* Page 1, lines 1-12; page 2, lines 22-28; page 3, line 9 - page 4, line 18; page 6, line 28 - page 7, line 5; page 7, line 39 - page 8, line 17; page 8, line 37 - page 9, line 20; figures 1,2 *</p> <p>--</p> <p><u>EP - A - 0 001 378</u> (UNITED TECHNOLOGIES)</p> <p>* Page 8, lines 5-30; figure 1 *</p> <p>--</p>	<p>1-3</p> <p>4</p>	<p>B 60 H 1/00</p>
P, E	<p><u>DE - A - 2 941 305</u> (NIPPON DENSO)</p> <p>* Page 10, line 12 - page 11, line 13; figure 1 *</p> <p>--</p>	1-3	<p>TECHNICAL FIELDS SEARCHED (Int. Cl.)</p> <p>B 60 H 1/00 G 05 D 23/19 23/20 23/24 F 24 F 11/08</p>
P, E	<p><u>FR - A - 2 437 312</u> (USINES RENAULT)</p> <p>* Page 4, lines 26-32; page 7, lines 12-26; page 9, lines 9-20; figures 1,6,9 *</p> <p>--</p>	1	
P, E	<p><u>DE - A - 2 939 954</u> (NIPPON DENSO)</p> <p>* Page 1, line 1 - page 3, line 11; page 5, lines 17-24; figure 1 *</p> <p>----</p>	1	<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: conflicting application D: document cited in the application L: citation for other reasons</p>
<p>X The present search report has been drawn up for all claims</p>			<p>&: member of the same patent family, corresponding document</p>
Place of search The Hague		Date of completion of the search 03-11-1980	Examiner HELOT

EPO Form 1503.1 06.78